


ISO相当 一般工業用 シリーズ(固定用)

材料	JIS記号	1種A
	NOK記号	A305

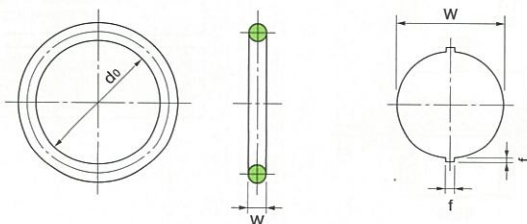

(単位: mm)

NOK 部品番号	(旧)ISO 呼び番号	O リング の 寸 法			NOK 部品番号	(旧)ISO 呼び番号	O リング の 寸 法		
		太さ W	内径 do	バリ寸法 f			太さ W	内径 do	バリ寸法 f
CO 7200 A	A0018 G	1.8	1.80	±0.13	CO 7242 A	B0300 G	2.65	±0.09	30.0 ±0.29
CO 7201 A	A0020 G		2.00		CO 7243 A	B0315 G			31.5 ±0.31
CO 7202 A	A0022 G		2.24		CO 7244 A	B0325 G			32.5 ±0.32
CO 7203 A	A0025 G		2.50		CO 7245 A	B0335 G			33.5 ±0.33
CO 7204 A	A0028 G		2.80	±0.14	CO 7246 A	B0345 G			34.5 ±0.33
CO 7205 A	A0031 G		3.15		CO 7247 A	B0355 G			35.5 ±0.34
CO 7206 A	A0035 G		3.55		CO 7248 A	B0365 G			36.5 ±0.35
CO 7207 A	A0037 G		3.75		CO 7249 A	B0375 G			37.5 ±0.36
CO 7208 A	A0040 G		4.00		CO 7250 A	B0387 G			38.7 ±0.37
CO 1012 A	A0045 G		4.50	±0.15	CO 7251 A	C0180 G	3.55	±0.10	18.0 ±0.21
CO 7209 A	A0048 G	1.8	4.87		CO 7252 A	C0190 G			19.0 ±0.22
CO 7210 A	A0050 G		5.00		CO 7253 A	C0200 G			20.0 ±0.22
CO 7211 A	A0051 G		5.15		CO 7254 A	C0212 G			21.2 ±0.23
CO 7212 A	A0053 G		5.30		CO 7255 A	C0224 G			22.4 ±0.24
CO 6868 A	A0056 G		5.60		CO 7256 A	C0236 G			23.6 ±0.25
CO 3026 A	A0060 G		6.00		CO 7257 A	C0250 G			25.0 ±0.25
CO 7213 A	A0063 G		6.30		CO 7258 A	C0258 G			25.8 ±0.26
CO 7038 A	A0067 G		6.70		CO 7259 A	C0265 G			26.5 ±0.26
CO 7214 A	A0069 G		6.90	±0.16	CO 7260 A	C0280 G			28.0 ±0.28
CO 7215 A	A0071 G		7.10		CO 7261 A	C0300 G	3.55	±0.10	30.0 ±0.29
CO 7216 A	A0075 G	1.8	7.50		CO 7262 A	C0315 G			31.5 ±0.31
CO 7217 A	A0080 G		8.00		CO 7263 A	C0325 G			32.5 ±0.32
CO 7218 A	A0085 G		8.50		CO 7264 A	C0335 G			33.5 ±0.33
CO 7219 A	A0087 G		8.75		CO 7265 A	C0345 G			34.5 ±0.33
CO 1061 A	A0090 G		9.00		CO 7266 A	C0355 G			35.5 ±0.34
CO 7221 A	A0095 G		9.50		CO 7267 A	C0365 G			36.5 ±0.35
CO 7222 A	A0100 G		10.0		CO 7268 A	C0375 G			37.5 ±0.36
CO 7223 A	A0106 G		10.6		CO 7269 A	C0387 G			38.7 ±0.37
CO 7224 A	A0112 G		11.2	±0.17	CO 7270 A	C0400 G			40.0 ±0.38
CO 1109 A	A0118 G		11.8		CO 7271 A	C0412 G	3.55	±0.10	41.2 ±0.39
CO 7225 A	A0125 G	1.8	12.5		CO 7272 A	C0425 G			42.5 ±0.40
CO 7226 A	A0132 G		13.2		CO 7273 A	C0437 G			43.7 ±0.41
CO 3441 A	A0140 G		14.0		CO 7274 A	C0450 G			45.0 ±0.42
CO 6822 A	A0150 G		15.0		CO 7275 A	C0462 G			46.2 ±0.43
CO 6861 A	A0160 G		16.0		CO 7276 A	C0475 G			47.5 ±0.44
CO 7227 A	A0170 G		17.0		CO 7277 A	C0487 G			48.7 ±0.45
CO 7228 A	B0140 G		14.0 ±0.19		CO 7278 A	C0500 G			50.0 ±0.46
CO 7229 A	B0150 G		15.0 ±0.20		CO 7279 A	C0515 G			51.5 ±0.47
CO 7230 A	B0160 G		16.0 ±0.21		CO 7280 A	C0530 G			53.0 ±0.48
CO 7231 A	B0170 G	2.65	17.0 ±0.21	0.12以下	CO 7281 A	C0545 G	3.55	±0.10	54.5 ±0.50
CO 7232 A	B0180 G		18.0 ±0.21		CO 7282 A	C0560 G			56.0 ±0.51
CO 7233 A	B0190 G		19.0 ±0.22		CO 7283 A	C0580 G			58.0 ±0.52
CO 7234 A	B0200 G		20.0 ±0.22		CO 7284 A	C0600 G			60.0 ±0.54
CO 7235 A	B0212 G		21.2 ±0.23		CO 7285 A	C0615 G			61.5 ±0.55
CO 7236 A	B0224 G		22.4 ±0.24		CO 7286 A	C0630 G			63.0 ±0.56
CO 7237 A	B0236 G		23.6 ±0.24		CO 7287 A	C0650 G			65.0 ±0.58
CO 7238 A	B0250 G		25.0 ±0.25		CO 7288 A	C0670 G			67.0 ±0.59
CO 7239 A	B0258 G		25.8 ±0.26		CO 7289 A	C0690 G			69.0 ±0.61
CO 7240 A	B0265 G		26.5 ±0.26		CO 7290 A	C0710 G			71.0 ±0.63
CO 7241 A	B0280 G		28.0 ±0.28		CO 7291 A	C0730 G	3.55	±0.10	73.0 ±0.64

■ご注文の際には、①(旧)ISO呼び番号と②NOK部品番号を
合わせてご指定ください。

例)内径31.5 太さ2.65 1種A材を購入したい場合

・NOK呼び番号：B 0315 G

・NOK部品番号：CO 7243 A


※製品はJIS規格のISOシリーズと合致していますが、呼び番号に
旧JIS規格のISOシリーズを適用しています。

(単位：mm)

NOK 部品番号	(旧)ISO 呼び番号	O リ ン グ の 寸 法			バリ寸法f
		太さ W	内径 do		
CO 7292 A	C0750 G	3.55	75.0	±0.66	0.14以下
CO 7293 A	C0775 G		77.5	±0.67	
CO 7294 A	C0800 G		80.0	±0.69	
CO 7295 A	C0825 G		82.5	±0.71	
CO 7296 A	C0850 G		85.0	±0.73	
CO 7297 A	C0875 G		87.5	±0.75	
CO 7298 A	C0900 G		90.0	±0.77	
CO 7299 A	C0925 G		92.5	±0.79	
CO 7300 A	C0950 G		95.0	±0.81	
CO 7301 A	C0975 G		97.5	±0.83	
CO 7302 A	C1000 G		100	±0.84	
CO 7303 A	C1030 G		103	±0.87	
CO 7304 A	C1060 G	5.30	106	±0.89	0.16以下
CO 7305 A	C1090 G		109	±0.91	
CO 7306 A	C1120 G		112	±0.93	
CO 7307 A	C1150 G		115	±0.95	
CO 7308 A	C1180 G		118	±0.97	
CO 7309 A	C1220 G		122	±1.00	
CO 7310 A	C1250 G		125	±1.03	
CO 7311 A	C1280 G		128	±1.05	
CO 7312 A	C1320 G		132	±1.08	
CO 7313 A	C1360 G		136	±1.10	
CO 7314 A	C1400 G		140	±1.13	
CO 7315 A	C1450 G	5.30	145	±1.17	0.16以下
CO 7316 A	C1500 G		150	±1.20	
CO 7317 A	C1550 G		155	±1.24	
CO 7318 A	C1600 G		160	±1.27	
CO 7319 A	C1650 G		165	±1.31	
CO 7320 A	C1700 G		170	±1.34	
CO 7321 A	C1750 G		175	±1.38	
CO 7322 A	C1800 G		180	±1.41	
CO 7323 A	C1850 G		185	±1.44	
CO 7324 A	C1900 G		190	±1.48	
CO 7325 A	C1950 G		195	±1.51	
CO 7326 A	C2000 G		200	±1.55	
CO 7327 A	D0400 G	5.30	40.0	±0.38	0.16以下
CO 7328 A	D0412 G		41.2	±0.39	
CO 7329 A	D0425 G		42.5	±0.40	
CO 7330 A	D0437 G		43.7	±0.41	
CO 4643 A	D0450 G		45.0	±0.42	
CO 7331 A	D0462 G		46.2	±0.43	
CO 7332 A	D0475 G		47.5	±0.44	
CO 7333 A	D0487 G		48.7	±0.45	
CO 7334 A	D0500 G		50.0	±0.46	
CO 7335 A	D0515 G		51.5	±0.47	
CO 7336 A	D0530 G		53.0	±0.48	
CO 7337 A	D0545 G	5.30	54.5	±0.50	0.16以下
CO 7338 A	D0560 G		56.0	±0.51	
CO 7339 A	D0580 G		58.0	±0.52	
CO 7340 A	D0600 G		60.0	±0.54	
CO 7341 A	D0615 G		61.5	±0.55	
CO 7342 A	D0630 G		63.0	±0.56	
CO 7343 A	D0650 G		65.0	±0.58	
CO 7344 A	D0670 G		67.0	±0.59	
CO 7345 A	D0690 G		69.0	±0.61	
CO 7346 A	D0710 G		71.0	±0.63	
CO 7347 A	D0730 G		73.0	±0.64	
CO 7348 A	D0750 G	5.30	75.0	±0.66	0.16以下
CO 7349 A	D0775 G		77.5	±0.67	
CO 7350 A	D0800 G		80.0	±0.69	
CO 7351 A	D0825 G		82.5	±0.71	
CO 7352 A	D0850 G		85.0	±0.73	
CO 7353 A	D0875 G		87.5	±0.75	
CO 7354 A	D0900 G		90.0	±0.77	
CO 7355 A	D0925 G		92.5	±0.79	
CO 7356 A	D0950 G		95.0	±0.81	
CO 7357 A	D0975 G		97.5	±0.83	
CO 7358 A	D1000 G		100	±0.84	
CO 7359 A	D1030 G		103	±0.87	
CO 7360 A	D1060 G	5.30	106	±0.89	0.16以下
CO 7361 A	D1090 G		109	±0.91	
CO 7362 A	D1120 G		112	±0.93	
CO 7363 A	D1150 G		115	±0.95	
CO 7364 A	D1180 G		118	±0.97	
CO 7365 A	D1220 G		122	±1.00	
CO 7366 A	D1250 G		125	±1.03	
CO 7367 A	D1280 G		128	±1.05	
CO 7368 A	D1320 G		132	±1.08	
CO 7369 A	D1360 G		136	±1.10	
CO 7370 A	D1400 G		140	±1.13	
CO 7371 A	D1450 G		145	±1.17	
CO 7372 A	D1500 G	5.30	150	±1.20	0.16以下
CO 7373 A	D1550 G		155	±1.24	
CO 7374 A	D1600 G		160	±1.27	
CO 7375 A	D1650 G		165	±1.31	
CO 7376 A	D1700 G		170	±1.34	
CO 7377 A	D1750 G		175	±1.38	
CO 7378 A	D1800 G		180	±1.41	
CO 7379 A	D1850 G		185	±1.44	
CO 7380 A	D1900 G		190	±1.48	
CO 7381 A	D1950 G		195	±1.51	
CO 7382 A	D2000 G		200	±1.55	
CO 7383 A	D2060 G	5.30	206	±1.59	0.16以下
CO 7384 A	D2120 G		212	±1.63	
CO 7385 A	D2180 G		218	±1.67	
CO 7386 A	D2240 G		224	±1.71	
CO 7387 A	D2300 G		230	±1.75	
CO 7388 A	D2360 G		236	±1.79	
CO 7389 A	D2430 G		243	±1.83	
CO 7390 A	D2500 G		250	±1.88	

ISO相当 一般工業用 シリーズ(固定用)

材料	JIS記号	1種A
	NOK記号	A305

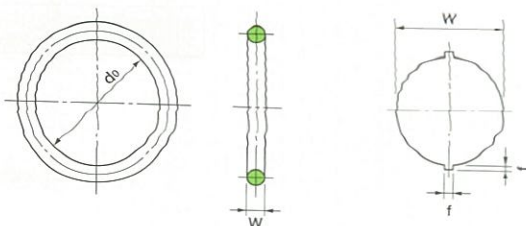

(単位: mm)

NOK 部品番号	(旧)ISO 呼び番号	O リング の 寸 法		
		太さ W	内径 do	バリ寸法 f
CO 7391 A	D2580 G	5.30 ±0.13	258 ±1.93	0.16以下
CO 7392 A	D2650 G		265 ±1.98	
CO 7393 A	D2720 G		272 ±2.02	
CO 7394 A	D2800 G		280 ±2.08	
CO 7395 A	D2900 G		290 ±2.14	
CO 7396 A	D3000 G		300 ±2.21	
CO 7397 A	D3070 G		307 ±2.25	
CO 7398 A	D3150 G		315 ±2.30	
CO 7399 A	D3250 G		325 ±2.37	
CO 7400 A	D3350 G		335 ±2.43	
CO 7401 A	D3450 G	5.30 ±0.13	345 ±2.49	0.16以下
CO 7402 A	D3550 G		355 ±2.56	
CO 7403 A	D3650 G		365 ±2.62	
CO 7404 A	D3750 G		375 ±2.68	
CO 7405 A	D3870 G		387 ±2.76	
CO 7406 A	D4000 G		400 ±2.84	
CO 7407 A	E1090 G		109 ±0.91	
CO 7408 A	E1120 G		112 ±0.93	
CO 7409 A	E1150 G		115 ±0.95	
CO 7410 A	E1180 G		118 ±0.97	
CO 7411 A	E1220 G		122 ±1.00	
CO 7412 A	E1250 G	7.00 ±0.15	125 ±1.03	0.18以下
CO 7413 A	E1280 G		128 ±1.05	
CO 7414 A	E1320 G		132 ±1.08	
CO 7415 A	E1360 G		136 ±1.10	
CO 7416 A	E1400 G		140 ±1.13	
CO 7417 A	E1450 G		145 ±1.17	
CO 7418 A	E1500 G		150 ±1.20	
CO 7419 A	E1550 G		155 ±1.24	
CO 7420 A	E1600 G		160 ±1.27	
CO 7421 A	E1650 G		165 ±1.31	
CO 7422 A	E1700 G	7.00 ±0.15	170 ±1.34	0.18以下
CO 7423 A	E1750 G		175 ±1.38	
CO 7424 A	E1800 G		180 ±1.41	
CO 7425 A	E1850 G		185 ±1.44	
CO 7426 A	E1900 G		190 ±1.48	
CO 7427 A	E1950 G		195 ±1.51	
CO 7428 A	E2000 G		200 ±1.55	
CO 7429 A	E2060 G		206 ±1.59	
CO 7430 A	E2120 G		212 ±1.63	
CO 7431 A	E2180 G		218 ±1.67	
CO 7432 A	E2240 G	7.00 ±0.15	224 ±1.71	0.18以下
CO 7433 A	E2300 G		230 ±1.75	
CO 7434 A	E2360 G		236 ±1.79	
CO 7435 A	E2430 G		243 ±1.83	
CO 7436 A	E2500 G		250 ±1.88	
CO 7437 A	E2580 G		258 ±1.93	
CO 7438 A	E2650 G		265 ±1.98	
CO 7439 A	E2720 G		272 ±2.02	
CO 7440 A	E2800 G		280 ±2.08	
CO 7441 A	E2900 G	7.00 ±0.15	290 ±2.14	0.18以下
CO 7442 A	E3000 G		300 ±2.21	
CO 7443 A	E3070 G		307 ±2.25	
CO 7444 A	E3150 G		315 ±2.30	
CO 7445 A	E3250 G		325 ±2.37	
CO 7446 A	E3350 G		335 ±2.43	
CO 7447 A	E3450 G		345 ±2.49	
CO 7448 A	E3550 G		355 ±2.56	
CO 7449 A	E3650 G		365 ±2.63	
CO 7450 A	E3750 G		375 ±2.68	
CO 7451 A	E3870 G	7.00 ±0.15	387 ±2.76	0.18以下
CO 7452 A	E4000 G		400 ±2.84	
CO 7453 A	E4120 G		412 ±2.91	
CO 7454 A	E4250 G		425 ±2.99	
CO 7455 A	E4370 G		437 ±3.07	
CO 7456 A	E4500 G		450 ±3.15	
CO 6711 A	E4620 G		462 ±3.22	
CO 7457 A	E4750 G		475 ±3.30	
CO 7458 A	E4870 G		487 ±3.37	
CO 7459 A	E5000 G		500 ±3.45	
CO 7460 A	E5150 G	7.00 ±0.15	515 ±3.54	0.18以下
CO 7461 A	E5300 G		530 ±3.63	
CO 7462 A	E5450 G		545 ±3.72	
CO 7463 A	E5600 G		560 ±3.81	
CO 7464 A	E5800 G		580 ±3.93	
CO 7465 A	E6000 G		600 ±4.05	
CO 7466 A	E6150 G		615 ±4.13	
CO 7467 A	E6300 G		630 ±4.22	
CO 7468 A	E6500 G		650 ±4.34	
CO 7469 A	E6700 G		670 ±4.46	

■ご注文の際には、①(旧)ISO呼び番号と②NOK部品番号を合わせてご指定ください。

例)内径400 太さ5.30 1種A材を購入したい場合

・NOK呼び番号: D4000 G

・NOK部品番号: CO 7406 A

※製品はJIS規格のISOシリーズと合致していますが、呼び番号に旧JIS規格のISOシリーズを適用しています。